



PRÁCTICA 4. Instala el servidor de noticias News Leafnode sobre Ubuntu y configura el mismo. Utiliza el cliente del apartado anterior para acceder a las noticias.


Para ello vamos al gestor de paquetes synaptic, lo seleccionamos

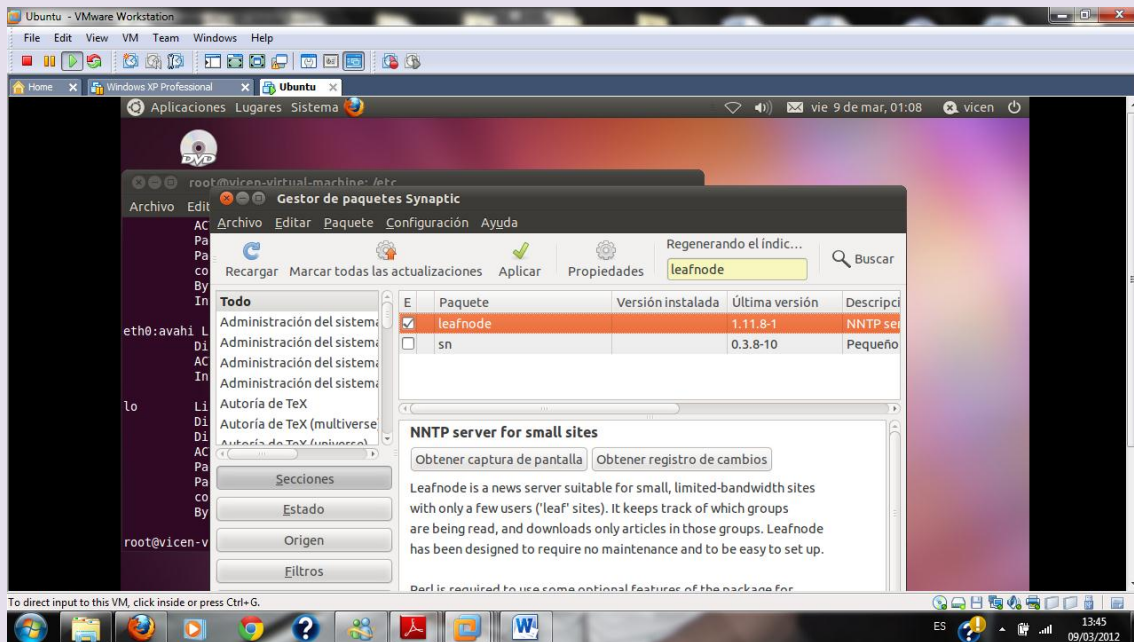

Y lo instalamos

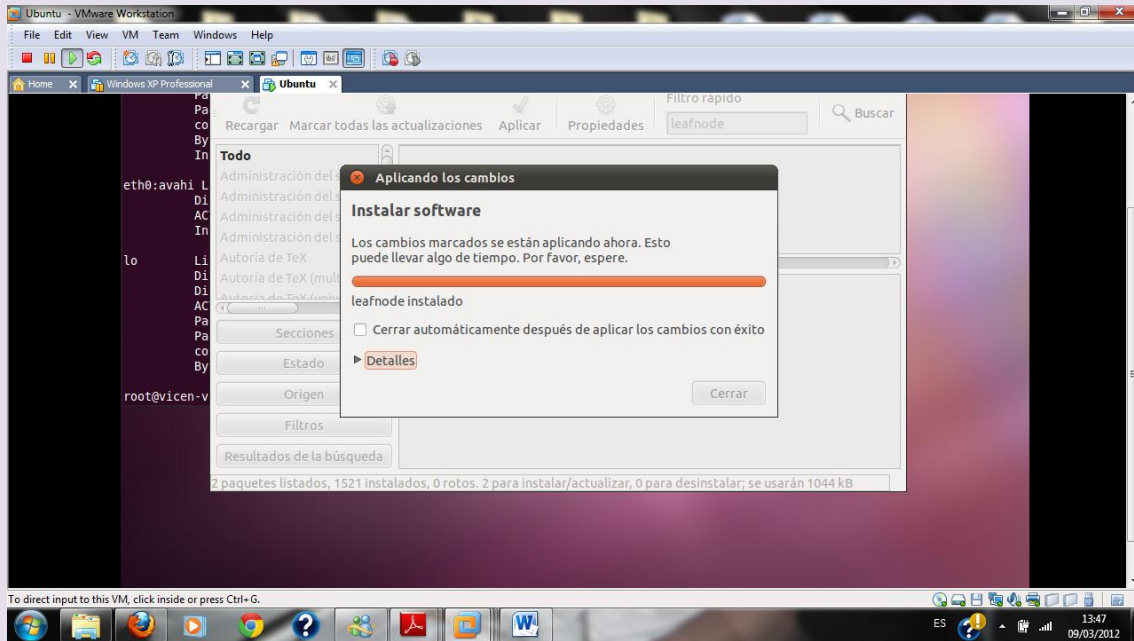

Cambiamos el nombre de hostname

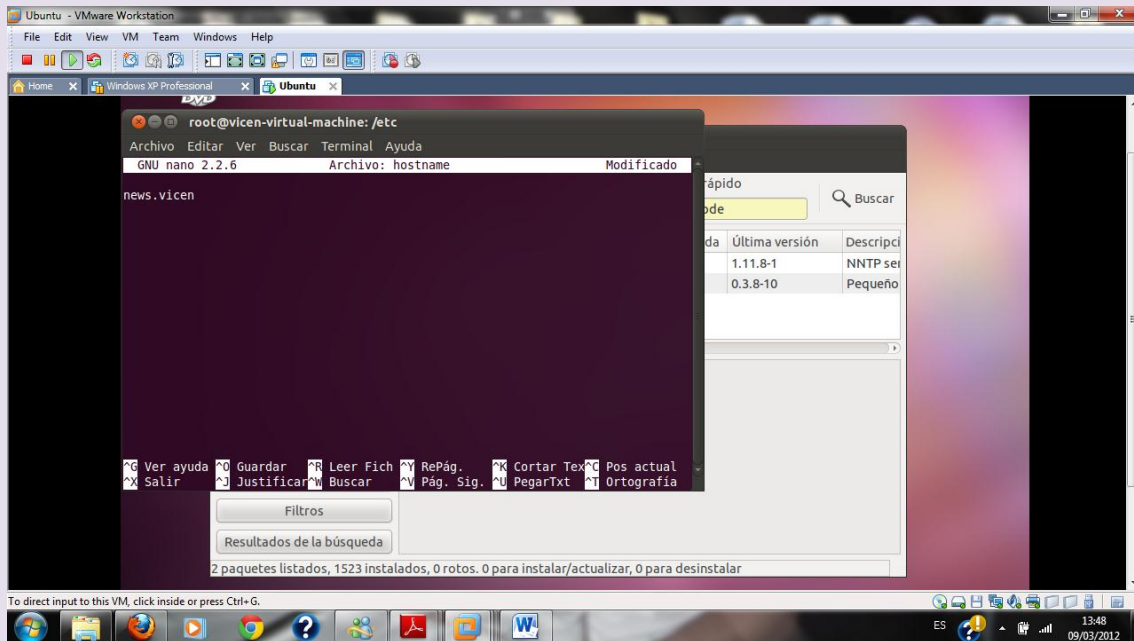

Configuramos usuario y contraseña

```

root@vicen-virtual-machine: /etc/news/leafnode (on vicen-virtual-machine)
GNU nano 2.2.6 Archivo: config Modificado

## The higher, the more output will be logged - note the debugging
## output is copious in any case, so leave this at 0 for normal use,
## and set to 1, 2 or 3 only for debugging.
# debugmode = 3

## I have free access to my news server. If you don't have, comment out
## the following two lines and change them accordingly.
username = vicen
password = inves

## By default, leafnode only serves connections from addresses in the
## local networks and drops those from outside. An IPv4 address, or an
## IPv6 address on computers that provide the getifaddrs() interface is
## considered local if it is within the networks (IP/netmask) of the local
## interfaces. On computers that lack the getifaddrs() interface, an
## IPv6 address is considered local if it is site-local, link-local or
## the loopback address (::1).

```

Ponemos el nombre de hostname

```

root@vicen-virtual-machine: /etc/news/leafnode (on vicen-virtual-machine)
GNU nano 2.2.6 Archivo: config Modificado

## enough free traffic left or a flat rate (no per-MByte billing), uncomment
## this:
# article despite filter = 1


## If your newsreader does not supply a Message-ID for your postings
## Leafnode will supply one, using the hostname of the machine it is
## running on. If this hostname is not suitable, this parameter can be
## used to override it. Do not use a fantasy name, it may interfere with
## the propagation of your messages. Most modern newsreaders do provide
## a Message-ID.
hostname = news.vicen

## You can also override the From: header address shown in placeholder
## articles. It should be the news administrator's mail address.
# newsadmin = postmaster@another.example.org


## If in your local Usenet hierarchy, posting unencoded 8-bit data in

```


Creamos un fichero con el nombre del grupo de noticias

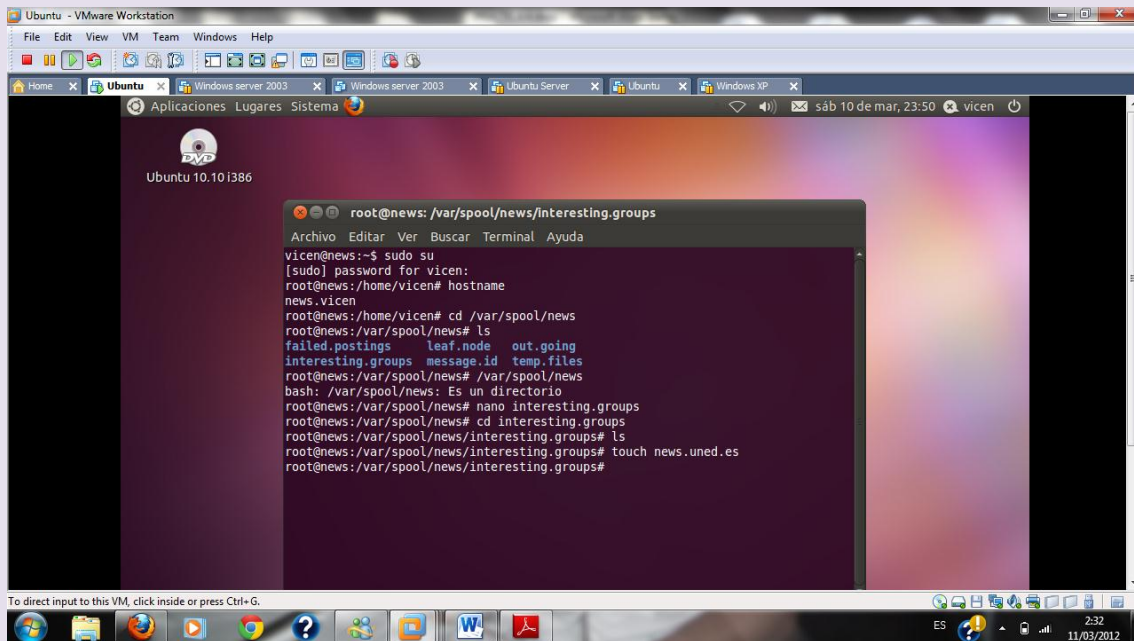

Ahora accedemos desde el cliente

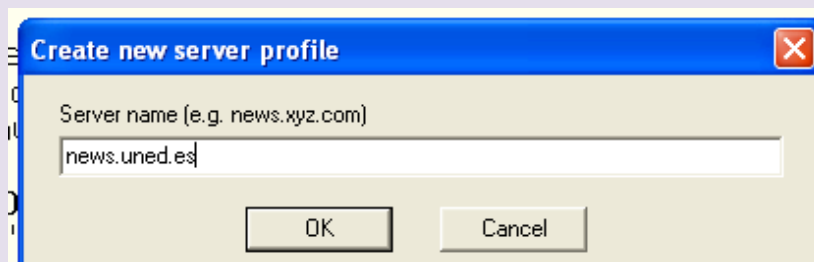

Ponemos el alias

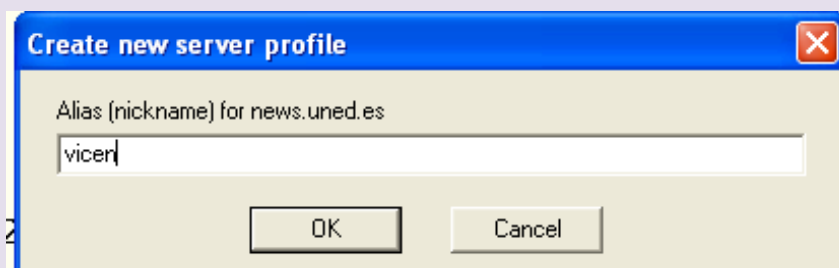

Y accedemos al servidor, pero no tenemos ninguna noticia a la que suscribirnos

